


A4	1	2	3	4	5	6	7	8	9
						REV.	LOCATION	DATE	DECRPTION


MPO/PC -MPO/PC Armored Patch Cord MM OM4 12F 3.0mm Plenum Aqua

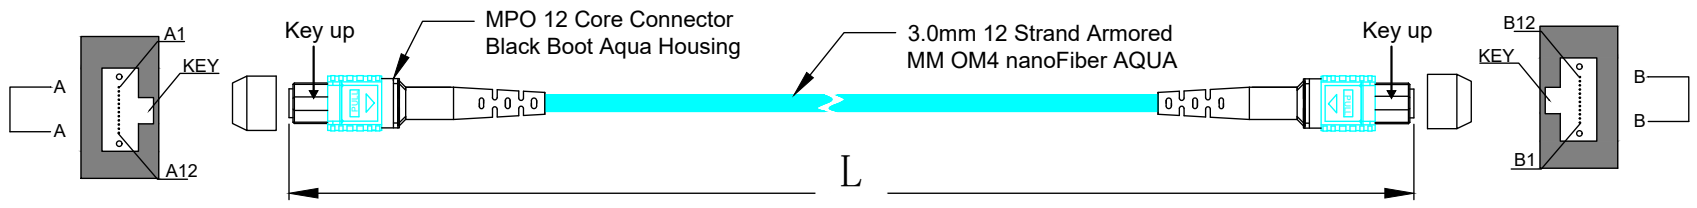

A	Fiber colour	B
Pin No.		Pin No.
1	Blue	12
2	Orange	11
3	Green	10
4	Brown	9
5	Gray	8
6	White	7
7	Red	6
8	Black	5
9	Yellow	4
10	Violet	3
11	Pink	2
12	Aqua	1

Polarity for 12 fibers

NANOFIBER ARMORED CABLE STRUCTURE

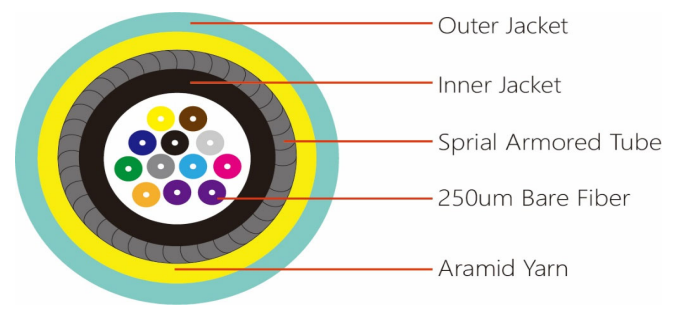

PART NO.	CABLE LENGTH
NF12N-MPO-OM4-150	150 Feet
NF12N-MPO-OM4-250	250 Feet
NF12N-MPO-OM4-500	500 Feet
NF12N-MPO-OM4-750	750 Feet

Fiber Type	MM OM4
Attenuation Coefficient	850nm≤3.0dB/km 1300nm≤1.0dB/km
Length Error	
L≤10m, ΔL(length error):0≤ΔL≤10cm	
L>10m, ΔL(length error):0≤ΔL≤1%*L	

Type	MPO	MPO	Optical Fiber Type	MM OM4	
Specification	PC	PC	Optical Fiber Specification	50/125um	
Performance	IL	≤0.70dB	≤0.70dB	Operating temperature(°C)	-25~+70
	RL	≥25dB	≥25dB	Storage temperature(°C)	-25~+70
Material	PLENUM		Wavelength(nm)	850/1300	
Colour	Aqua		Diameter of cable(mm)	3.0	
Unit	mm	Ver.	D1		
Unit	1:1	Date			
Page	1/1	Drawing by			
Material:	Drawing by	Drawing by			

